




Gallium Nitride 28V 50W, RF Power Transistor

Description

The STA58051GX is a 50W internally matched, GaN HEMT, designed from 4.0 to 6.0GHz, especially 5G NR or LTE application, as well as either Pulse or CW application
There is no guarantee of performance when this part is used in applications designed Outside of these frequencies.

STA58051GX



•Typical 4-6G broadband performance (on narrow band fixture with device soldered)

Freq(MHz)	Pin(dBm)	Pout(dBm)	Pout(W)	IDS(A)	Gain(dB)	Eff(%)
4000	39.7	46.43	43.95	3.22	6.73	48.75
4200	38.09	46.74	47.21	3.35	8.65	50.33
4400	38.44	46.74	47.21	3.04	8.3	55.46
4600	39.39	46.72	46.99	3.01	7.33	55.75
4800	38.37	46.79	47.75	2.77	8.42	61.57
5000	37.66	46.83	48.19	2.61	9.17	65.95
5200	36.93	46.65	46.24	2.65	9.72	62.32
5400	37.9	47.04	50.58	2.95	9.14	61.24
5600	37.59	46.73	47.10	2.93	9.14	57.41
5800	37.93	46.66	46.34	2.9	8.73	57.07
6000	38.85	46.6	45.71	3	7.75	54.42

•Typical performance (on broadband fixture with device soldered)

V_{DD}=28V I_{DQ}=100mA, CW

FREQ (MHZ)	P1dB(dBm)	P1dB(W)	P1dB Eff(%)	P1dB Gain(dB)	P3dB(dBm)	P3dB(W)	P3dB Eff(%)
5100	45.92	39.1	52.5	11.56	47.6	57.5	59.8
5200	45.95	39.4	51.6	11.4	47.56	57.1	58.4
5300	46	39.9	52.9	11.68	47.7	58.9	60.4
5400	46.08	40.6	53.0	11.82	47.8	60.2	60.8
5500	46.05	40.3	51.5	11.83	47.77	59.9	59.0
5600	46.11	40.8	51.9	12.06	47.92	62.0	59.8
5700	46.06	40.3	50.6	12.04	47.97	62.7	58.8
5800	45.96	39.4	49.6	11.84	47.9	61.6	57.8
5900	45.7	37.2	50.6	11.72	47.7	58.9	59.3



Applications and Features

- Suitable for wireless communication infrastructure, wideband amplifier, EMC testing, ISM etc.
- High Efficiency and Linear Gain Operations
- Thermally Enhanced Industry Standard Package
- High Reliability Metallization Process
- Excellent thermal Stability and Excellent Ruggedness
- Compliant to Restriction of Hazardous Substances (RoHS) Directive 2002/95/EC

Important Note: Proper Biasing Sequence for GaN HEMT Transistors

Turning the device ON

1. Set VGS to the pinch-off (VP) voltage, typically -5 V
2. Turn on VDS to nominal supply voltage (28V)
3. Increase VGS until IDS current is attained
4. Apply RF input power to desired level

Turning the device OFF

1. Turn RF power off
2. Reduce VGS down to VP, typically -5 V
3. Reduce VDS down to 0 V
4. Turn off VGS

Table 1. Maximum Ratings

Rating	Symbol	Value	Unit
Drain--Source Voltage	V_{DS}	150	Vdc
Gate--Source Voltage	V_{GS}	-10,+2	Vdc
Operating Voltage	V_{DD}	36	Vdc
Maximum Forward Gate Current @ $T_C = 25^\circ\text{C}$	I_{gmax}	12.5	mA
Storage Temperature Range	T_{stg}	-65 to +150	$^\circ\text{C}$
Case Operating Temperature	T_C	+150	$^\circ\text{C}$
Operating Junction Temperature(See note 1)	T_J	+225	$^\circ\text{C}$
Total Device Power Dissipation (Derated above 25°C , see note 2)	P_{diss}	75	W

Note: 1. Continuous operation at maximum junction temperature will affect MTTF
2. Bias Conditions should also satisfy the following expression: $P_{diss} < (T_J - T_C) / R_{JC}$ and $T_C = T_{case}$

Table 2. Thermal Characteristics

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction to Case $T_C = 85^\circ\text{C}$, $T_J = 200^\circ\text{C}$, RF CW operation	$R_{\theta JC}$	1.8	C/W

Table 3. Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = -8\text{V}$; $I_{DS} = 12.6\text{mA}$	V_{DSS}	150			V
Gate Threshold Voltage	$V_{DS} = 28\text{V}$, $I_D = 12.6\text{mA}$	$V_{GS(th)}$	-4		-2	V
Gate Quiescent Voltage	$V_{DS} = 28\text{V}$, $I_{DS} = 100\text{mA}$, Measured in Functional Test	$V_{GS(Q)}$		-3.16		V

Typical performance

4-6GHz

Figure 2: Small signal gain and return loss Vs Frequency

V_{ds}=28V, I_{dq}=100mA, input power=0dBm


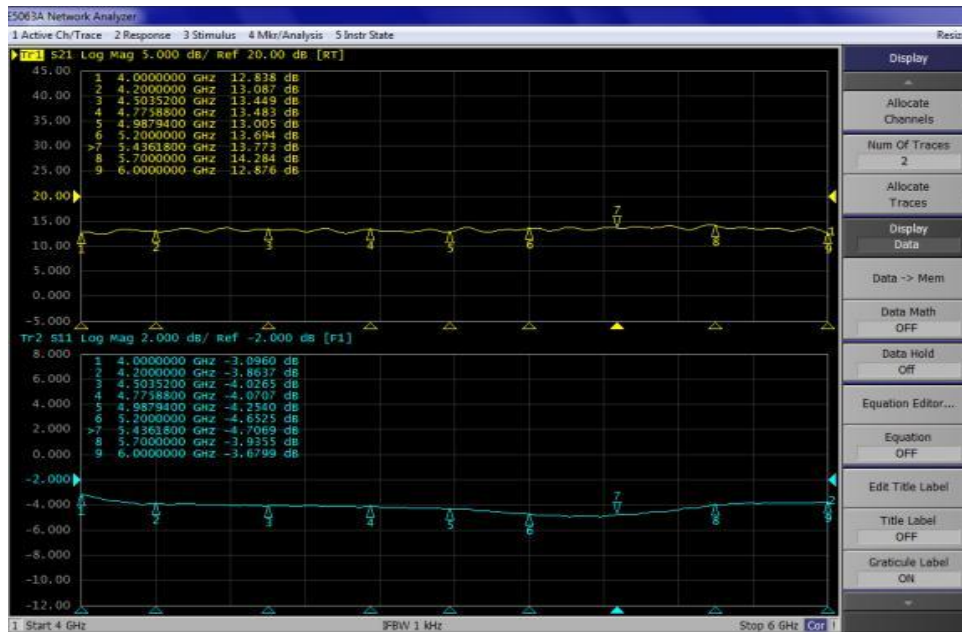


Figure 3: Picture and Bill of materials of 5.7-5.9GHz wide band application circuit
(Layout Gerber file upon request)



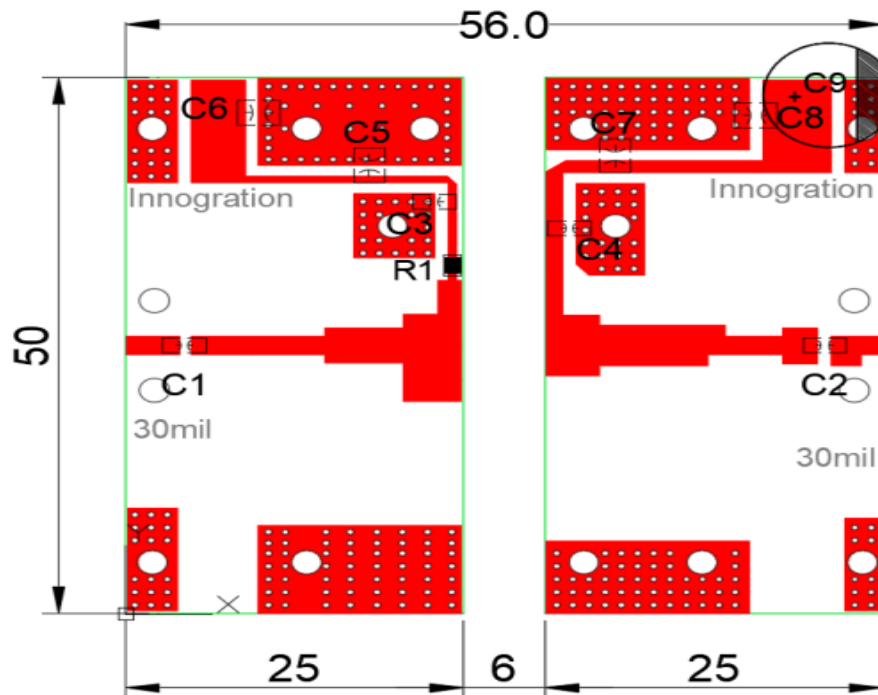

Component	Description	Suggested Manufacturer
C9	470uF/63V	
C5-C8	10uF	1210
C1-C4	3.9pF	MQ300805C0G2E3R0BNDR
R1	Chip Resistor,10Ω	0805
PCB	Rogers 4350B, Er = 3.48, thickness 30 mils, 1oz copper	

5.1-5.9GHz

Figure 4: Small signal gain and return loss Vs Frequency
Vds=28V, Idq=100mA, input power=0dBm

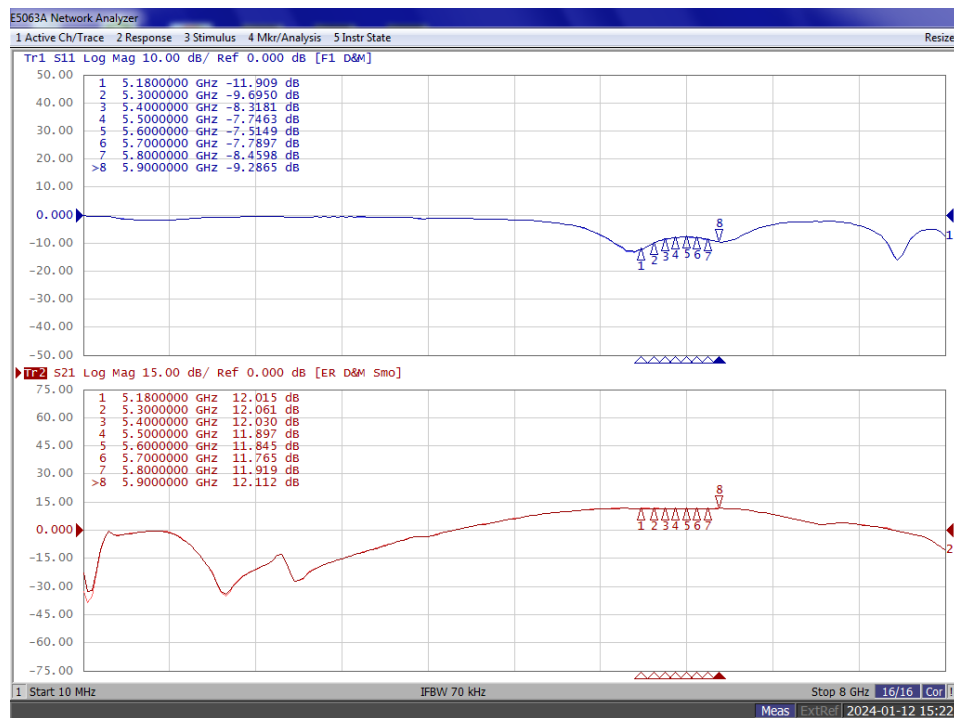


Figure 5: Efficiency and power gain as function of Pout

STA58051GX Class AB Vds= 28V, Idq=137.5mA
PulseWidth= 20us, DutyCycle= 10%, DEMO1


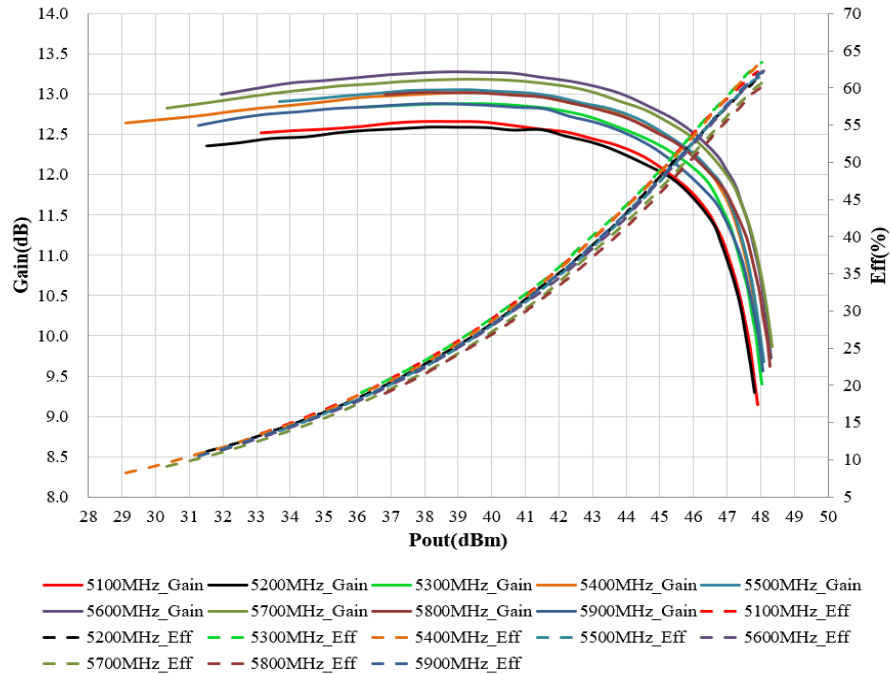


Figure 6: Picture and Bill of materials of 5.1-5.9GHz wide band application circuit
(Layout Gerber file upon request, 20mils RO4350B)



Component	Value	Quantity
U1	STA58051GX	1
C1、C2、C3、C4	3.9pF	4
C6、C7、C8	10uF/63V	3
C5	10uF/16V	1
R1	10 Ω	1
C9	470uF/63V	1

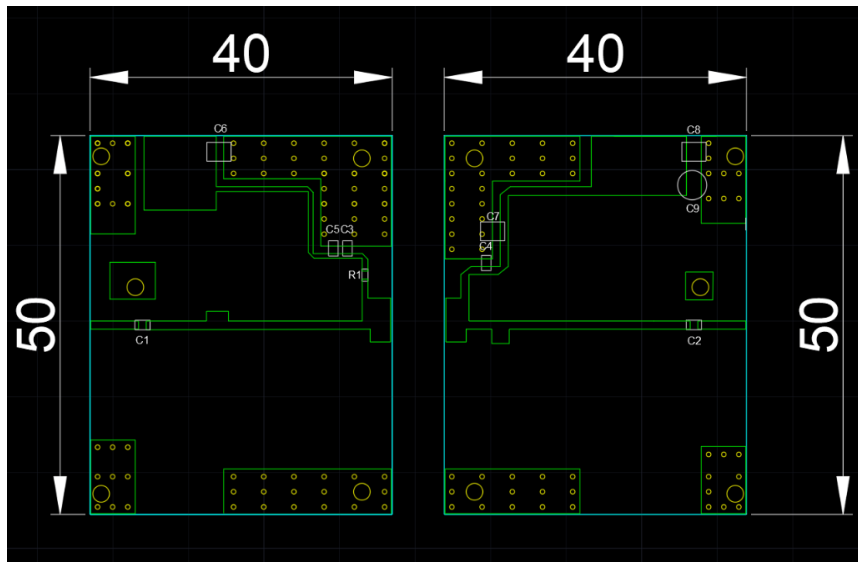

Package Outline

Flanged ceramic package; 2 leads

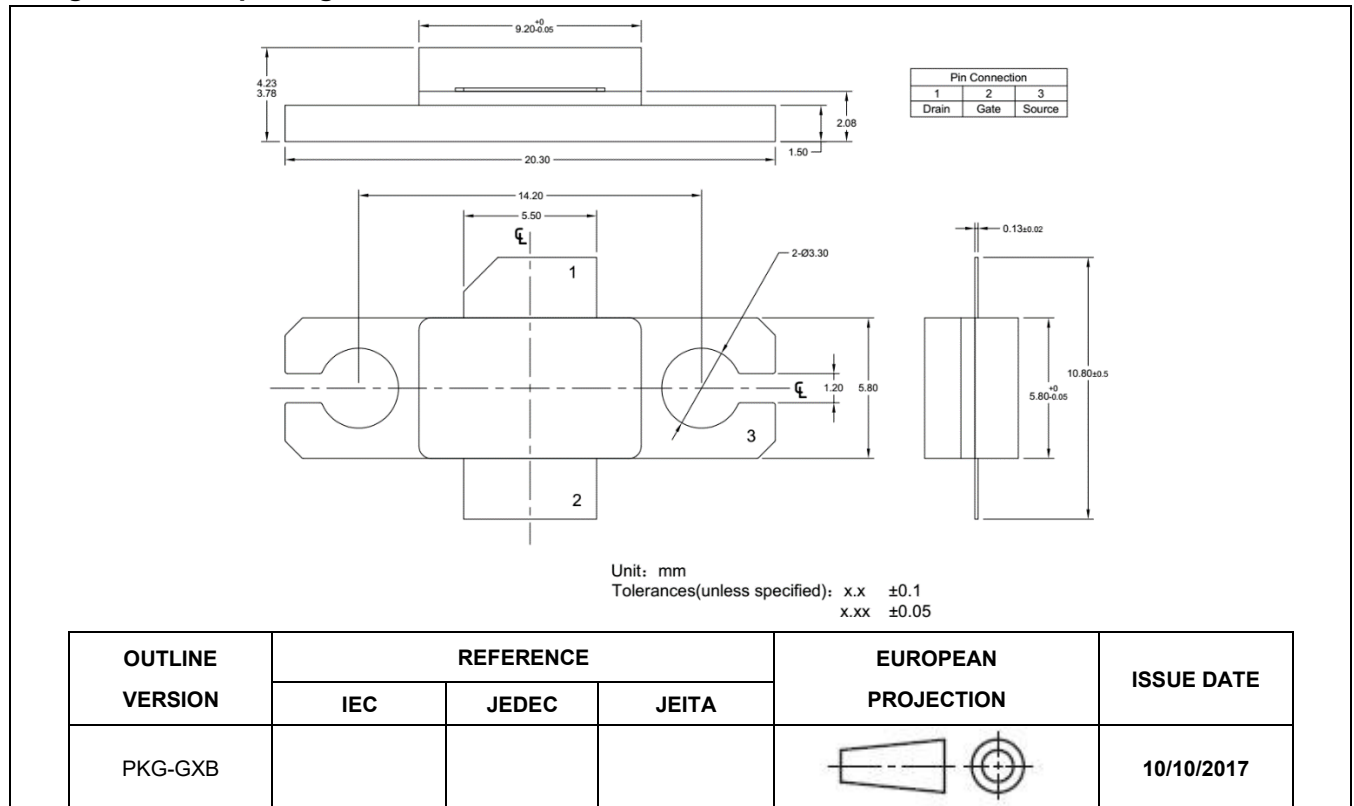


Figure 1. Package Outline PKG-G2E



Revision history

Table 5. Document revision history

Date	Revision	Datasheet Status
2023/9/25	V1.0	Preliminary Datasheet Creation
2024/1/14	V1.1	Add 5.1-5.9GHz data
2025/9/26	V2.0	Change the lower frequency to 4.0GHz, and add 4-6GHz data

Application data based on YHG-23-25/ZYX-24-01/23-26

Notice

Specifications are subject to change without notice. Innegration believes the information within the data sheet to be reliable. Innegration makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose.

“Typical” parameter is the average values expected by Innegration in quantities and are provided for information purposes only. It can and do vary in different applications and related performance can vary over time. All parameters should be validated by customer’s technical experts for each application.

Innegration products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Innegration product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

For any concerns or questions related to terms or conditions, please check with Innegration and authorized distributors

Copyright © by Innegration (Suzhou) Co.,Ltd.