

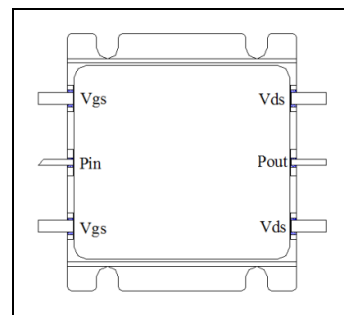


0.6-3.0GHz, 80W, GaN Fully matched PA Module

Description

The GMAH0630-80H3 is a 80-watt, single stage integrated Power Amplifier Module, designed for broad band applications, with frequencies from 0.6 to 3.0GHz. The module is 50 Ω input/output matched and requires minimal external components. It can work at higher voltage up to 32V with increased power capability

The module implements multiple GaN active dice and its matching network within highly compact 30.8*27.4mm metal RF package with excellent capability for heat dissipation.



Vgs = -2.4V, Vds = 28V, Idq = 250mA, CW

Freq(MHz)	Pin(dBm)	Pout(dBm)	Pout(W)	IDS(A)	Gain(dB)	Eff(%)	2 nd Harmonic	3 rd Harmonic
500	37.60	49.24	83.9	5.30	11.64	56.6	-14.3	-16.4
600	38.73	50.50	112.2	8.12	11.77	49.3	-9.8	-17.4
700	38.37	50.36	108.6	8.78	11.99	44.2	-8.7	-17.0
800	38.38	50.24	105.7	8.66	11.86	43.6	-9.7	-18.5
900	38.28	50.16	103.8	7.92	11.88	46.8	-8.2	-16.9
1000	38.00	50.34	108.1	8.70	12.34	44.4	-10.2	-15.5
1100	37.10	50.06	101.4	8.24	12.96	43.9	-10.4	-15.3
1200	37.00	50.30	107.2	7.81	13.30	49.0	-11.0	-14.1
1300	37.10	49.78	95.1	6.72	12.68	50.5	-10.3	-14.0
1400	37.00	49.45	88.1	5.89	12.45	53.4	-7.0	-19.0
1500	39.00	50.08	101.9	8.40	11.08	43.3	-10.5	-27.8
1600	40.40	50.42	110.2	9.96	10.02	39.5	-14.1	-27.0
1700	39.80	50.15	103.5	8.86	10.35	41.7	-14.2	-22.7
1800	39.70	50.20	104.7	8.37	10.50	44.7	-14.5	-19.5
1900	38.70	51.00	125.9	9.90	12.30	45.4	-16.1	-17.9
2000	38.30	50.83	121.1	9.85	12.53	43.9	-16.1	-22.7
2100	38.00	51.22	132.4	10.06	13.22	47.0	-23.0	-31.0
2200	39.00	51.03	126.8	10.15	12.03	44.6	-30.0	-27.8
2300	39.80	50.66	116.4	10.24	10.86	40.6	-29.7	-21.6
2400	40.10	50.50	112.2	9.90	10.40	40.5	-26.3	-26.6
2500	39.35	50.00	100.0	8.38	10.65	42.6	-21.9	-34.3
2600	39.03	49.30	85.1	6.88	10.27	44.2	-15.6	-36.7
2700	37.60	49.02	80.1	6.56	11.30	42.3	-14.2	-29.4
2800	35.00	49.68	92.9	6.35	14.68	52.2	-16.2	-32.6
2900	35.70	49.95	98.9	6.99	14.25	50.5	-18.1	-33.6
3000	37.50	50.21	105.0	7.63	12.71	49.1	-25.8	-29.9



Product Features

- Operating Frequency Range: 0.6-3.0GHz
- Operating Drain Voltage(Recommended): +28 V (up to 32V with power increased >90W)
- 50 Ω Input/Output (External DC block capacitor needed)
- $P_{sat} \geq 49$ dBm (CW)
- Small signal gain:>13dB, Power gain:>11dB
- Minimum efficiency:>35%
- 30.8*27.4 mm metal RF package
- Compliant to Restriction of Hazardous Substances (RoHS) Directive 2002/95/EC

Applications

- Ultra Broadband Amplifiers, typically 0.8-2.5GHz, 1-2GHz,2-3GHz
- L band power amplifier, typically 960-1215MHz, 1200-1400MHz.1400-1600MHz
- Test Instrumentation
- EMC Amplifier Drivers
- 2-way Radios


Table 1. Maximum Ratings

Rating	Symbol	Value	Unit
Drain--Source Voltage	V_{DS}	150	Vdc
Gate--Source Voltage	V_{GS}	-10 to +2	Vdc
Operating Voltage	V_{DD}	+32	Vdc
Storage Temperature Range	T_{stg}	-65 to +150	°C
Case Operating Temperature	T_c	+150	°C
Operating Junction Temperature	T_j	+225	°C

Table 2. Thermal Characteristics

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction to Case $T_c = 25^\circ\text{C}$, $P_{out} = 80\text{W}$, FEA	$R_{\theta JC}$	1.3	°C/W

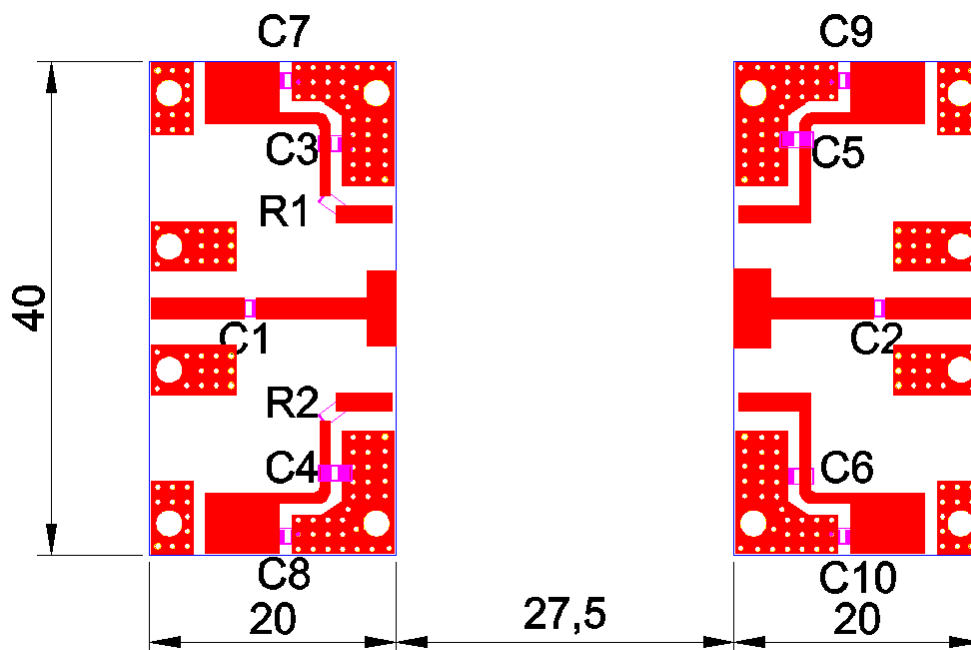Typical application circuit



Component	Description	Suggested Manufacturer / Series Number
C1 C3 C4 C5 C6	6.8 pF	MQ200805
C2	6.8 pF x 2	MQ301111
C7 C8 C9 C10	10 uF	TDK
R1	10 Ohm	1206 SMD Resistor
PCB	30Mil Rogers 4350	Rogers

TYPICAL CHARACTERISTICS

Figure 1. Network analyzer output S11/S21 (Pin=0dBm, Idq=500mA)

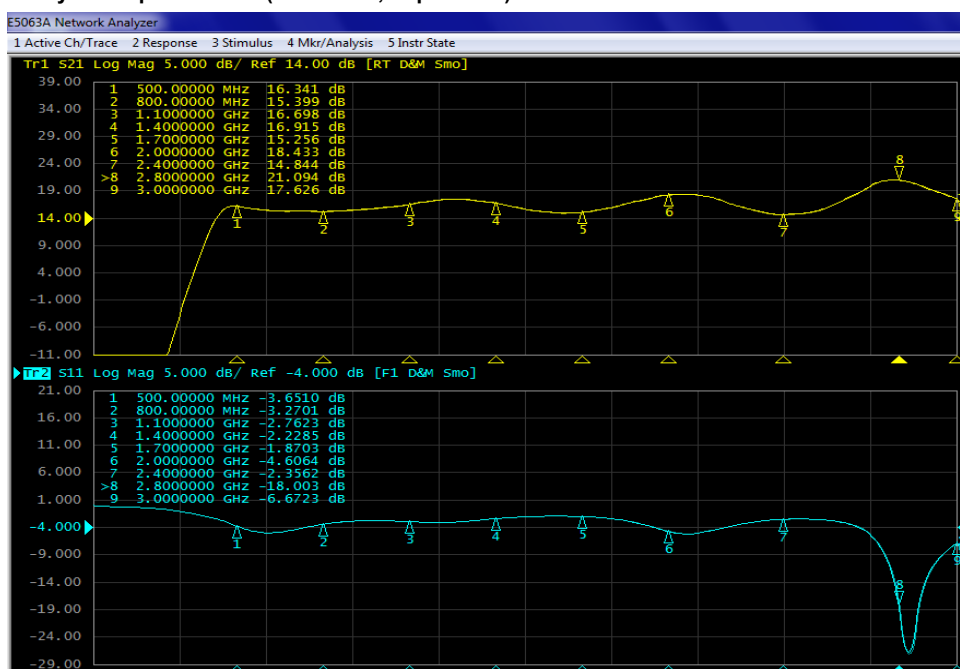
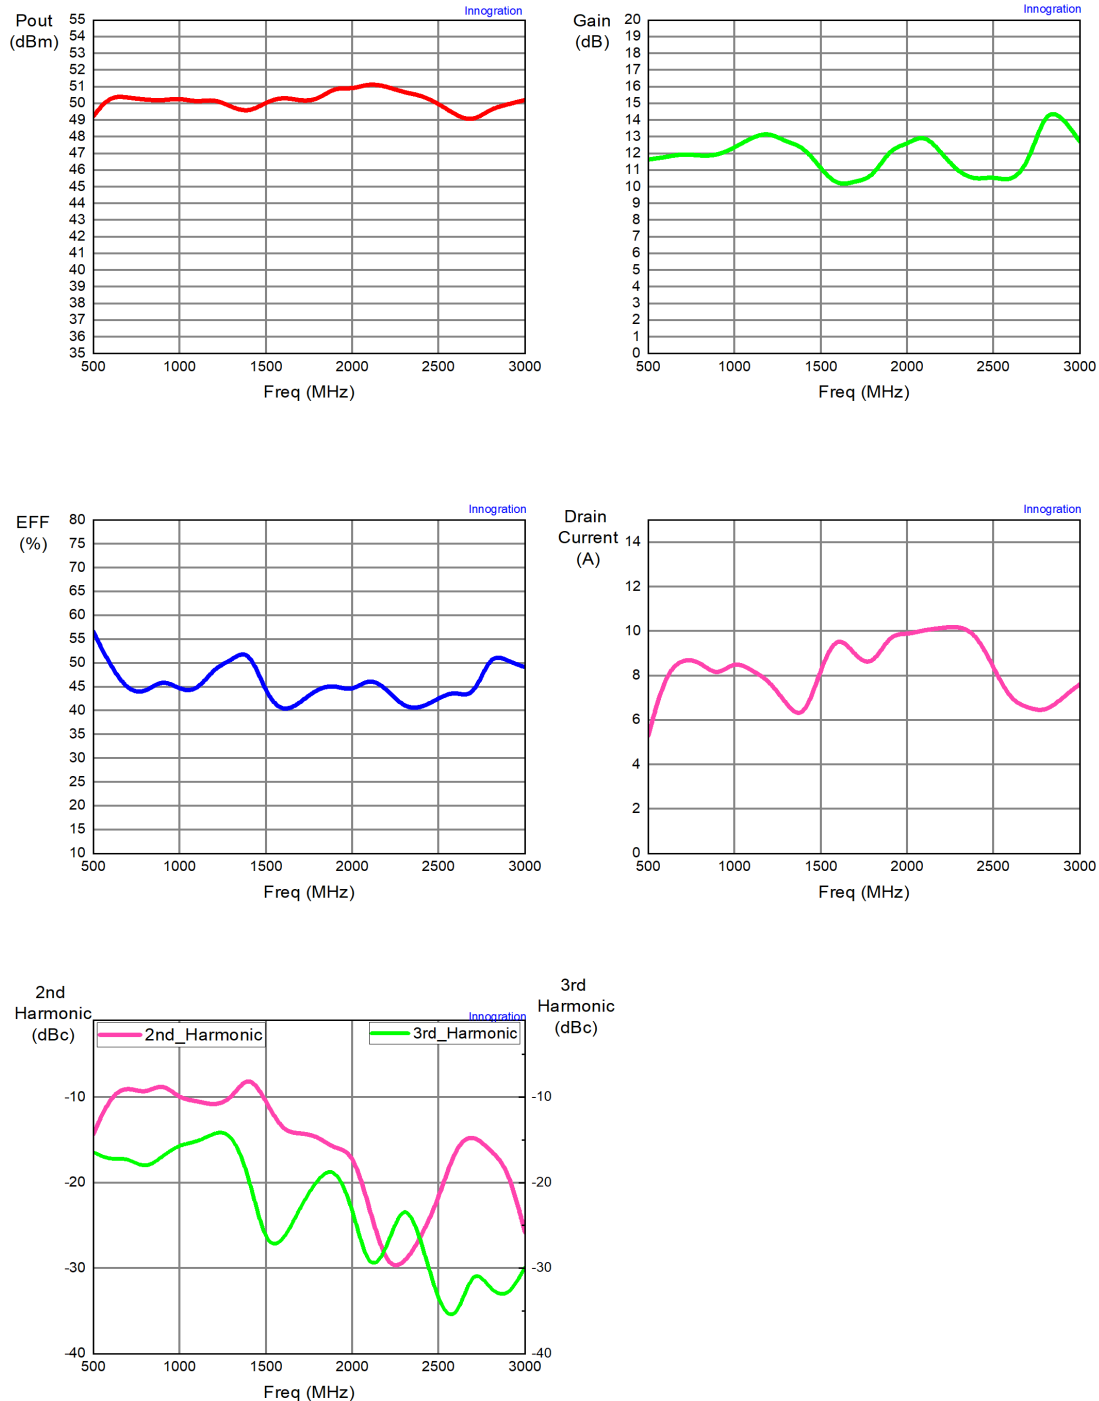


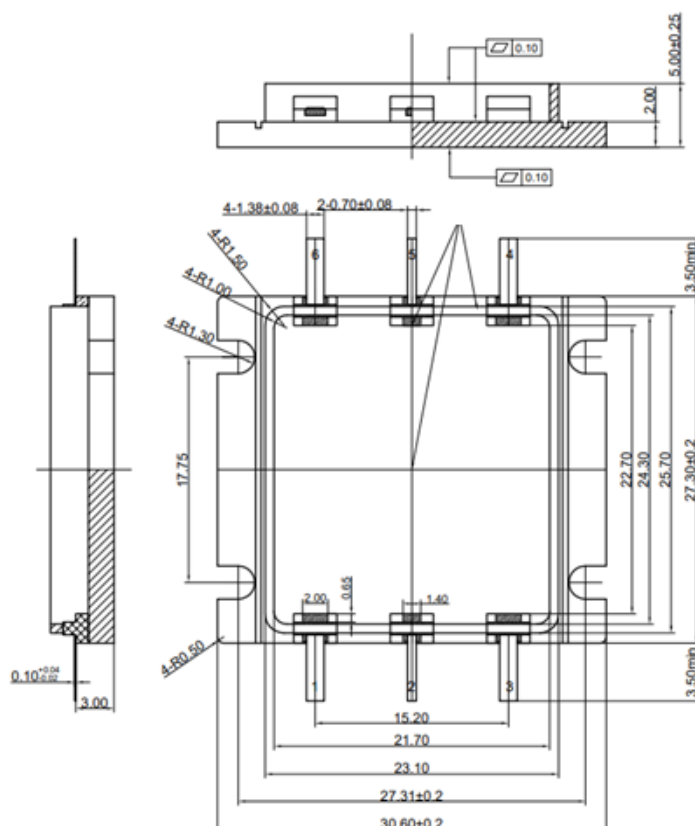


Figure 3. Psat, Eff and Power Gain, Eff, Drain current, Harmonics Vs Frequency across the band

GMAH0630-80H3 CW Test
Vgs=-2.41V Vds=28V Idq=250mA



Package Dimensions (Unit:mm)



Revision history

Table 6. Document revision history

Date	Revision	Datasheet Status
2023/6/28	Rev 1.0	Advanced Datasheet
2025/8/14	Rev 1.0	Preliminary datasheet according to the finalized lid sealed

Application data based on JF-23-06/JF-25-16

Disclaimers

Specifications are subject to change without notice. Innogration believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Innogration for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Innogration. Innogration makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Innogration in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Innogration products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Innogration product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility. For any concerns or questions related to terms or conditions, pls check with Innogration and authorized distributors

Copyright © by Innogration (Suzhou) Co.,Ltd.